

IMP-1064-10-PM



DEVICE

1064 nm, 10 GHz Intensity Modulator, PM Output

OVERVIEW

The Optilab IMP-1064-10-PM Intensity Modulator is designed for external modulation of 1064 nm laser up to 10 GHz or 12.5 Gb/s. It is also applicable for pulse generation for Ytterbium-Doped Fiber Amplifier amplification (YDFA) in satellite links and active mode locked laser applications. It is a bias-stabilized lithium modulator that proves to be extremely stable for long periods of time, and features excellent stability in a biased circuit, operating from 1030 nm to 1090 nm. It has an excellent operating temperature tolerance ranging from -30° C to +75° C. The IMP-1064-10-PM uses a Polarization Maintaining (PM) input and output fiber, featuring separate RF and bias ports. Contact Optilab for more information.


FEATURES


- 1030-1090 nm wavelength
- Low Drive Voltage
- 3 dB bandwidth up to 10 GHz
- PM input and output
- High extinction ratio

USE IN

- Pulse generation for YDFA
- Up to 12.5 Gb/s Data Rate
- Satellite Link
- Active mode locked laser
- Research and development

FUNCTIONAL DIAGRAM

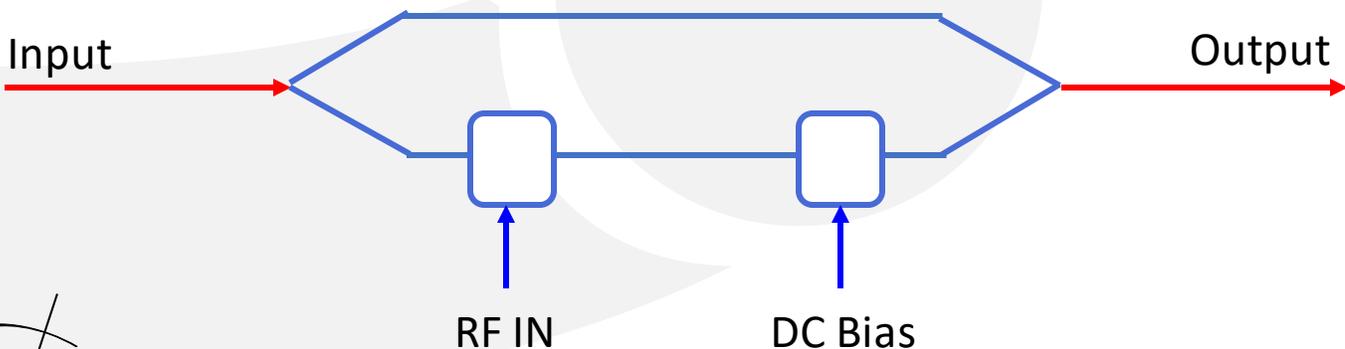

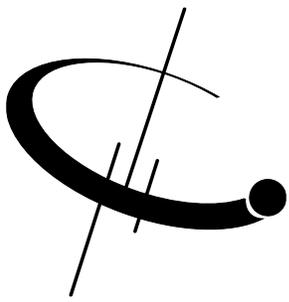

IMP-1064-10-PM

SPECIFICATIONS


GENERAL

Input Optical Power	100 mW max.
Operating Wavelength	1030 to 1090 nm
Chirp Value	$< \pm 0.2$
Insertion Loss	5.0 dB max., 4.5 dB typ.
Extinction Ratio	20 dB min.
Optical Return Loss	45 dB min.
S21 Bandwidth (RF Port)	7 GHz min., 10 GHz typ.
S11 Return Loss (RF Port)	≤ -7 dB @ 10 GHz
$V\pi$ (RF Port)	4.0 V typ., 4.5 V max.
RF Input Power	26 dBm Maximum
Impedance (RF Port)	$50 \pm 5\Omega$
$V\pi$ (Bias Port)	6.8 V typ., 7.5 V max.
Impedance (Bias Port)	$> 1 M\Omega$

MECHANICAL

Operating Temperature (Standard)	-30°C to +75 °C
Storage Temperature	-60 °C to +85 °C
Operating Humidity	0% to 90% Relative Humidity
Input/Output Fiber Type	PM 980 - 400
Input/Output Connector	FC/APC, key aligned to slow axis
Material	LiNbO ₃
Crystal Orientation	X-cut, Y-propagating
RF Port Connectors	K type female
Cabling	900 μ m tubing
Dimensions	3.783" x 0.981" x 0.640"





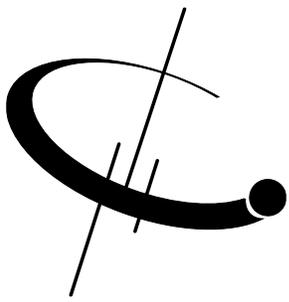


IMP-1064-10-PM

MECHANICAL DRAWING

1. IMP-1064-10-PM Housing

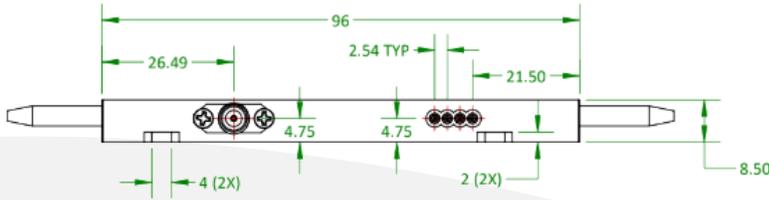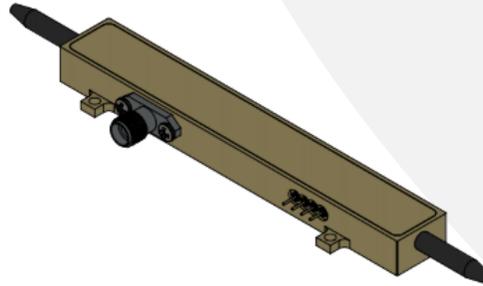


FRONT VIEW

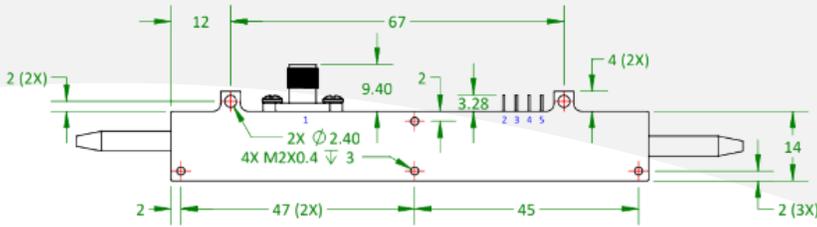

BOTTOM VIEW

PIN #	Symbol
1	RF
2	Not Connected
3	Not Connected
4	PD-A
5	PD-C



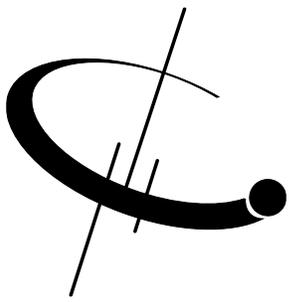

IMP-1064-10-PM

ORDERING
OPTIONS

IMP-1064-10-PM-XX

Available
Accessories

- **BCB-4**



The Optilab BCB-4 is a compact bias control board designed for IMP-1064-10-PM modulator

- **YDFA-PA-MSA**



The Optilab YDFA-PA-MSA is a high-gain Dual Stage Pre-amplifier module in a multiple source agreement footprint housing.

